

HDL-M/P2R.1

Figure 1 / 图 1



HDL-M/P3R.1

Figure 2 / 图 2

Customizable label / 可定制标签

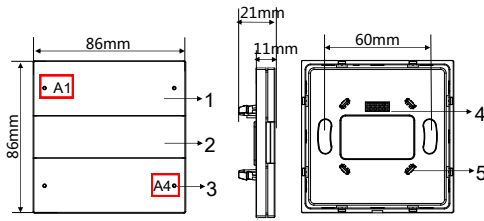


Figure 3 / 图 3

Figure 4 / 图 4

Figure 5 / 图 5

HDL-M/P2R.1

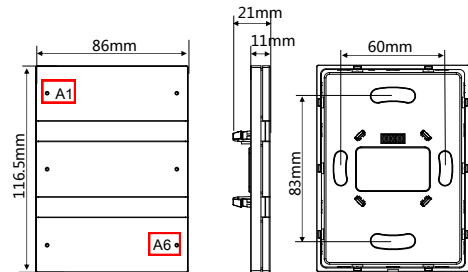


Figure 6 / 图 6

Figure 7 / 图 7

Figure 8 / 图 8

HDL-M/P3R.1

EN

Overview

Granite (See Figure 1-2) is a multi-function panel, which supports multiple control modes. It is embedded with RGB light for each button. Any color and brightness of label backlight and button indicator can be set in ETS software.

Functions

- Mechanical buttons and button backlights are available;
- Supports button work modes: Left & right button combined mode or independent button mode;
- Adjustable color and brightness of the label backlight and button indicator;
- Supports multiple control modes: Switch control, dimming control, Shutter control, Flexible control, Scene control, Sequence control, Percentage control, Threshold control, String (14 bytes) control, Alternate control, RGB control, Fan control, Thermostat control, Combination control;
- With built-in temperature probe, the panel can automatically obtain the temperature information;
- The button indicator can be displayed mutual exclusively;
- Press the top left corner and the lower right corner button(A1 and A4 for HDL-M/P2R.1, A1 and A6 for HDL-M/P3R.1) simultaneously for 2 seconds, the panel will enter programming mode.

Important Notes

- The panel must be wall box mounted.
- It must work in conjunction with the power interface.
- Special programming – This device is designed for professional KNX installation. It can only be programmed by ETS software.

Product Information

Product dimensions—See Figure 3-8

- 1. Control button:** It is used to control the status of the targets
 - 2. Label backlight:** It is for label backlight. The brightness can be automatically adjusted. The color and brightness of the indicator can be defined by user.
 - 3. Button indicator:** It is used to indicate the status of the targets. The color and brightness of the indicator can be defined by user.
 - 4. Communication interface:** It connects to panel power interface.
 - 5. Fastener:** It connects to panel power interface.
- Programming:** Press the top left corner and the lower right corner button(A1 and A4 for HDL-M/P2R.1, A1 and A6 for HDL-M/P3R.1) simultaneously for 2 seconds, the panel will enter programming mode.

The product installation and disassembly

(Take HDL-M/P2R.1 as an example)

Installation (See Figure 9-11): Fix the power interface into the wall box with screws. Hold the edge of panel, then insert the panel into the power interface module vertically.

Disassembly (See Figure 12): Insert the panel gap with a slotted screwdriver, and pry up the panel with a gentle force. Then the panel can be taken down.

Safety Precautions



- The installation and commissioning of the device must be carried out by HDL or the organization designated by HDL. For planning and construction of electric installations, the relevant guidelines, regulations and standards of the respective country are to be considered.
- The device should be wall box mounted. HDL takes no responsibility for all consequences caused by installation and wire connection which are not in accordance with this specification.
- Please do not privately disassemble the device or change components, otherwise it may cause mechanical failure, electric shock, fire or body injury.
- Please resort to our customer service department or designated agencies for maintenance service. The warranty is not applicable for the product fault caused by private disassembly.

Package Contents

HDL-M/P2R.1 or HDL-M/P3R.1*1 / Datasheet*1 / Warranty card*1

CN

产品概述

靛 (见图1-2) 是一款多功能面板, 支持多种控制模式。它设有多个按键, 每个按键内置RGB灯。客户可通过ETS软件配置自己喜欢的标签背光灯及按键指示灯亮度和颜色。

功能说明

- 设有机械按键及按键背光灯;
- 按键模式: 按键左右组合或独立按键模式;
- 标签背光灯及按键指示灯的背光亮度和颜色可调;
- 支持多种控制模式: 开关控制、调光控制、窗帘控制、灵活控制、场景控制、序列控制、百分比控制、阈值控制、字符串控制(14字节控制)、交替控制、RGB控制、风扇控制、简易恒温控制、组合控制;
- 内置温度探头, 可自动获取温度信息;
- 按键指示灯可以互斥显示;
- 同时按左上角和右下角按键(HDL-M/P2R.1: A1和A4; HDL-M/P3R.1: A1和A6)约2s, 面板将进入编程模式。

注意事项

- 面板必须暗盒安装。
- 必须与面板电源接口模块配合使用
- 编程- 本设备属于KNX标准设备, 使用ETS软件进行编程。

产品信息

产品尺寸—见图 3-8

- 1. 控制按键:** 控制目标的状态。
 - 2. 标签背光灯:** 是用于标签背光, 面板可自动调节背光灯亮度。用户可自定义标签背光灯的颜色和亮度。
 - 3. 按键指示灯:** 该指示灯可用于指示被控目标的状态。用户可自定义按键指示灯的颜色和亮度。
 - 4. 通信接口:** 连接面板电源底座。
 - 5. 卡扣:** 连接面板电源底座。
- 编程:** 同时按左上角和右下角按键(HDL-M/P2R.1: A1和A4; HDL-M/P3R.1: A1和A6)约2S, 面板将进入编程模式。

设备的安装和拆卸

(以HDL-M/P2R.1 为例)

安装(见图 9-11): 用螺丝将电源接口模块固定在暗盒里。手持面板边缘, 对准卡口, 垂直插入电源接口模块, 不可过分用力按压面板。

拆卸面板(见图 12): 用一字螺丝批插入面板缺口, 轻撬面板, 即可取下面板。

安全警告



- 本设备的安装及调试工作必须由我司或我司指定的机构进行。其电气安装的计划和施工, 必须遵守当地相关的安全标准和法规。
- 该产品需暗盒安装, 未按照本说明书进行安装及接线方式的, 所造成的一切后果皆与我司无关。
- 请不要私自拆装或更换零部件, 否则可能会导致机械故障、电击、火灾或身体伤害。
- 请将一切维修工作交由我司售后部门或指定机构进行, 本产品的保修范围不适用于因用户拆卸产品而导致的故障。

装箱清单

HDL-M/P2R.1 或 HDL-M/P3R.1*1 / 说明书*1 / 保修卡*1

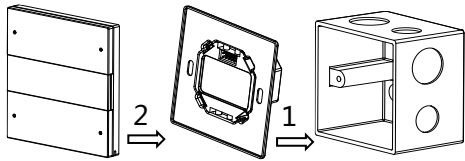


Figure 11 / 图 11 Figure 10 / 图 10 Figure 9 / 图 9




Figure 12 / 图 12

技术支持
服务热线：020-84651666-7094
(工作时间：9:00-12:00, 13:00-18:00, 星期一至星期五)
邮箱：kfb@hdlchina.com.cn
网址：<http://www.hdlchina.com>

Technical support
E-mail: support@hdlchina.com.cn
Website: <https://www.hdlautomation.com>

EN

Technical Data

Electrical Parameters

Working voltage	21~30V DC
Working current	6mA / 30V DC
Communication	KNX
KNX terminal	0.6-0.8mm single core cable

Environmental Conditions

Working temperature	-5°C~45°C
Working relative humidity	≤90%
Storage temperature	-20°C~60°C
Storage relative humidity	≤93%

Product Specifications

Dimensions	M/P2R.1: 86×86×11(mm) M/P3R.1: 86×116.5×11(mm)
Net weight	M/P2R.1: 109g M/P3R.1: 138g
Housing material	Glass, PC, ABS, Aluminum
Installation	Wall box (See Figure 9-11)
Protection rating (Compliant to EN 60529)	IP20

Name and content of harmful substances in products

Harmful substances	Part components			
	Circuit board	Housing	Wire	Accessory
Lead (Pb)	o	o	o	o
Mercury (Hg)	o	o	o	o
Cadmium (Cd)	o	o	o	o
Cr, VI	o	o	o	o
Poly-brominated biphenyls (PBB)	o	o	o	o
Poly-brominated diphenyl ethers (PBDE)	o	o	o	o

The circle symbol "o" indicates that the content of the harmful substances in all the homogeneous materials of the component is below the limit required by the Standard IEC62321-2015.

KNX Cable Guide

KNX	KNX cable
-	Black
+	Red

CN

技术参数

电气参数:

工作电压	21~30V DC
工作电流	6mA / 30V DC
通信协议	KNX
KNX总线接线端子	0.6-0.8mm单芯电缆

条件环境:

工作温度	-5°C~45°C
工作相对湿度	≤90%
储存温度	-20°C~60°C
储存相对湿度	≤93%

产品规格:

尺寸	M/P2R.1: 86×86×11(mm) M/P3R.1: 86×116.5×11(mm)
净重	M/P2R.1: 109g M/P3R.1: 138g
外壳材料	玻璃, PC, ABS, 压铸铝
安装方式	暗盒安装 (见图9-11)
防护级别 (符合 EN 60529)	IP20

产品中有害物质的名称及含量

有害物质	零部件			
	电路板	外壳	线材	附件
铅(Pb)	o	o	o	o
汞(Hg)	o	o	o	o
镉(Cd)	o	o	o	o
六价铬 (Cr, VI)	o	o	o	o
多溴联苯 (PBB)	o	o	o	o
多溴二苯醚(PBDE)	o	o	o	o

圆圈符号“o”，表示该有害物质在该部件所有均质材料中的含量均在IEC62321-2015规定的限量要求以下。

KNX总线定义

KNX	KNX 电缆
-	黑
+	红